



MAYTAG® COMMERCIAL SINGLE-LOAD STACK DRYER

TWO POCKETS IN THE SPACE OF ONE

You can help eliminate waiting for your residents with two dryer pockets in the same floor space as one single-load dryer. Laundry dries quickly and efficiently, thanks to a choice of cycles and powerful 220 cfm diagonal airflow.



FOR YOUR RESIDENTS:

- Display Shows Coin Countdown And Time Remaining In Cycle
- Super Capacity Handles Big And Bulky Loads
- Extra-Large Doors And Drum Openings
- Simple One-Touch Operation
- Canadian Model Features Dual Coin-Drop Operation

FOR YOUR FACILITY:

- Two Dryer Pockets In The Same Floor Space As One
- Faster Drying For Lower Energy Consumption
- Extra-Large Security Coin Vault
- Computer Trac® Controls Let You Adjust Prices By Day And Time
- Optional Audit System With Two-Way Data Communication

BUILT-TO-LAST™ FEATURES:

- Cushioned Drum Suspension With Permanently Lubricated Bearings
- Tri-Coat™ Cabinet Protection




MLE/MLG23PDF



EASY-TO-PROGRAM
**COMPUTER
TRAC®**
CONTROLS ARE SIMPLE
TO OPERATE.

LAUNDRY SOLUTIONS YOU CAN *DEPEND ON.*

CLP716

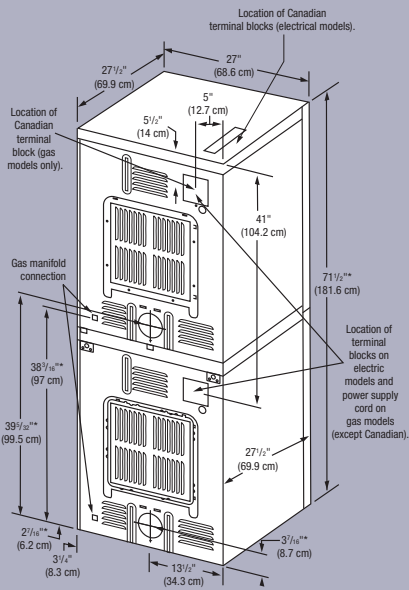

* Dimensions will vary according to adjustment of leveling legs; add 1/2" to 2" (1.3 cm to 5.1 cm) min.

MAXIMUM EXHAUST DUCT LENGTH PER NUMBER OF TURNS

Number Of 90° Turns	4"-diameter rigid metal duct	
	4" (10.2 cm)	2 1/2" (6.4 cm)
0	65 ft. (19.8 m)	59 ft. (18 m)
1	54 ft. (16.5 m)	48 ft. (14.6 m)
2	44 ft. (13.4 m)	38 ft. (11.6 m)
3	36 ft. (11 m)	30 ft. (9.1 m)
4	28 ft. (8.5 m)	22 ft. (6.7 m)

4"-diameter flexible stiff-walled metal duct		
0	36 ft. (11 m)	28 ft. (8.5 m)
1	32 ft. (9.8 m)	24 ft. (7.3 m)
2	28 ft. (8.5 m)	20 ft. (6.1 m)
3	25 ft. (7.6 m)	17 ft. (5.2 m)
4	23 ft. (7 m)	15 ft. (4.6 m)

OUR COMMITMENT TO DEPENDABLE QUALITY

At Maytag, we believe durable goods should remain just that. That's why every Maytag® product is constructed of the highest-quality materials and with the utmost in precision craftsmanship. It's also why we stand behind our equipment with solid service and support from our professional Maytag laundry suppliers. Simply put, when you choose Maytag® products, you ensure your peace of mind.



Single-Load Stack Dryer — MICROPROCESSOR COIN-DROP

Single-Load Stack Dryer/Dryer	
DRYER AND STACKED UNIT SPECIFICATIONS	
MODEL	MLE/MLG23PDF
MOTOR	
Single-phase, thermoprotected against overload, auto-reset	•
HP (kw)	1/4 (.19)
Tumble speed — rpm	50 ± 1.5
ELECTRICAL REQUIREMENTS	
Volts (Hz)	
Electric model	240 (60)
Gas model	120 (60)
Export models — volts (Hz)	220 – 240 (50)
Breaker/fuse requirements — amps	
Electric model (each drying chamber)	30
Electric model — export (one terminal block per stack)	40
Gas model (each drying chamber)	15
Gas model — export (one terminal block per stack)	10
Approx. overall wattage draw per drying chamber	5,900
Export models — wattage draw per drying chamber	4,800
CAPACITY — cu. ft. (cu. m)	6 (.17)
AIRFLOW	
Domestic models — cfm (cmm) per pocket	220 (6.2)
Export models — cfm (cmm) per pocket	180 (5)
EXHAUST DUCT DIAMETER — in. (cm)	2 outlets, 4 (10.2)*
NICHROME HELIX COIL HEATING ELEMENT (MLE models)	•
SINGLE-PORT BURNER WITH AUTOMATIC ELECTRIC IGNITION (MLG models)	•
GAS RATING (MLG models)	
Domestic models — BTU/hr. (kcal/hr.) per drying chamber	24,000 (6,048)
Export models — BTU/hr. (kcal/hr.) per drying chamber	20,000 (5,040)
Gas inlet — in. (cm)	2 inlets, 1/2 (1.3)
ADJUSTABLE LEVELING LEGS	
COLORS	
White	•
Bisque (select models)	•
APPROXIMATE WEIGHT	
Crated — lbs. (kg)	278 (125)
Uncrated — lbs. (kg)	254 (114)
DIMENSIONS	
Height — in. (cm)	71 1/2 (181.6) [†]
Width — in. (cm)	27 (68.6)
Depth — in. (cm)	27 1/2 (69.9) ^{††}

* Use a minimum of 4" (10.2 cm) diameter rigid aluminum or galvanized-steel duct. Never use plastic, non-metal or combustible duct.

[†] Dimensions will vary according to adjustment of leveling legs; add 1/2" to 2" (1.3 cm to 5.1 cm) min.

^{††} Additional depth with venting will take from 1 1/4" to 7" (2.9 cm to 17.9 cm) of depth depending on the vent method used.

Because of continuous product improvement, Maytag reserves the right to change specifications without notice.

